



Light-Power-Module

for the

Light Control

Light@Night and Light-DEC

Light-Power Part-No.: 050061

>> kit <<

At least one **Light-Power-Module** and one **Light-Interface (LI-LPT or LI-LAN)** will build together the hardware of the **PC-Layout Light Control Light@Night**.


If a **Light-Power-Module** will be connected to a **Light-DEC-Basic-Module** it will be the basic unit for the **Layout Light Control Light-DEC**.

Light-Power-Modules contain **24 light outputs** with a max. **current load of 2.5 Ampere each**.

The **lighting effects** (neon lamps, flashing blue light, light chains, traffic lights and many others) can be assigned individually to each of the **24 outputs**.

Suitable for analog and digital model railways.

This product is not a toy! Not suitable for children under 14 years of age! The kit contains small parts, which should be kept away from children under 3! Improper use will imply danger of injuring due to sharp edges and tips! Please store this instruction carefully.

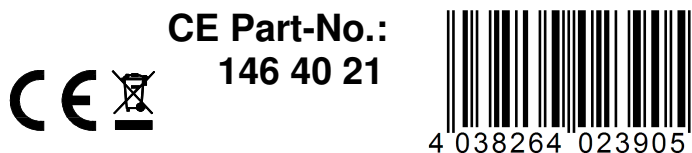

Introduction:

You have purchased a kit for your model railway that is supplied within the assortment of **Littfinski DatenTechnik (LDT)**.

- These kits are easy to assemble and they are a product of high quality.
- Model railway kits are not only welcome handicraft jobs but they can be purchased with a considerable price reduction. This will justify to spend about an hour because you do not need more time to assemble those kits.

We are wishing you having a good time using this product.

General:

Tools required for the assembly

Please assure that the following tools are available:

- a small side cutter
- a mini soldering iron with a small tip
- solder tin (if possible 0.5mm diameter)

Safety Instructions

- All electrical and electronic components included in this kit shall be used on low voltage only by using a tested and approved voltage transducer (transformer). All components are sensitive to heat. During soldering the heat shall be applied for a very short period only.
- The soldering iron develops up to 400°C. Please keep continual attention to this tool. Keep sufficient distance to combustible material. Use a heat resistant pad for this work.
- This kit consists of small parts, which can be possibly swallowed from children. Children (especially under 3 years) should not participate on the assembly without supervision.

Set-Up:

For the board-assembly please follow exact the sequence of the below **assembly list**. Cross each line off as **done** after completing the insertion and the soldering of the respective part.

For the **diode** please keep special attention to the correct polarity (marked line for the cathode).

Attend to the connection marked "+" at the **tantalum capacitor**. This mark has to correspond to the mark on the pc board.

Resistor networks are marked for assembly with a printed circle or a square at one end. Insert this component that way that the marking correspond with the first and second bore of the pc board. The first bore has been additionally marked at the pc board with a "1".

You can identify the **1kOhm network** by the printed **mark of 102** and the **100kOhm network** by the printed **mark 104**.

Please assemble the **clamps** to blocks of 15 and 21 connections.

The **transistors** have to be assembled in that direction that the metal side will face to the bold white line on the pc-board.


Integrated circuits (IC's) are either marked with a half round notch on one end or a printed point for the correct mounting position. Push the IC's into the correct socket assuring that the notch or the printed point is corresponding to the half-rounded marking on the pc-board.

Please attend to the sensitivity of the ICs to **electrostatic discharge** which will cause immediate damage of the IC. Before touching those components please discharge yourself by contacting an earthed metal (for example: an earthed radiator) or work with an electrostatic safety pad.

Cut out the **labels** for the **sockets BU2** and **BU3** and **stick** them onto the **RJ-45 sockets**. This will indicate an explicit identification for the connection of light power module via patch cable.



Label for BU3



Label for BU2

Assembly List:

Pos.	Qty.	Component	Remarks	Ref.	Done
1	1	Pc-board			
2	1	Diode 1N4003	attend to polarity!	D1	
3	3	IC-Socket 16poles		IC1...3	
4	3	Capacitors 100nF	100nF = 104	C1...3	
5	1	Tantalum cap. 10µF/10V	attend to polarity!	C4	
6	6	Networks 4*1kOhm	attend to polarity! (102)	RN1...6	
7	6	Networks 4*100kOhm	attend to polarity! (104)	RN7...12	
8	1	Socket bar 10poles		BU1	
9	1	Pin bar 10poles		ST1	
10	2	RJ45 Sockets		BU2, BU3	
11	12	Clamps 3poles	build blocks before assy.!	KL1...12	
12	24	Transistor BUZ11	attend to polarity!	T1...24	
13	3	IC: 4094	attend to polarity!	IC1...3	
14			Final Control		

Made in Europe by
Littfinski DatenTechnik (LDT)
 Bühler electronic GmbH
 Ulmenstraße 43
 15370 Fredersdorf / Germany
 Phone: +49 (0) 33439 / 867-0
 Internet: www.ldt-infocenter.com

Soldering instruction

Provided you have no special experience in soldering electronic components please read first this soldering instruction before starting the job. Soldering has to be trained!

1. Never use additional fluxes for soldering electronic circuits which contain acids (e.g. zinc chloride or ammonium chloride). Those can destroy components and printed circuits when not washed off completely.
 2. As soldering material only lead free soldering tin with a rosin core for fluxing should be used.
 3. Use a small soldering iron with max 30 Watt heating power. The solder tip shall be free from scale to assure an excellent heat transfer to the area to be soldered.
 4. The soldering shall be performed on a speedy way because a long heat transfer can destroy the components. Too much or too long heating can take off the copper pads and copper tracks from the board.
 5. For a good soldering a well tinned solder-tip has to be brought in contact to the copper-pad and the component wire at the same time. Simultaneous a little solder-tin shall be applied for heating up. As soon as the solder-tin starts melting the tin wire has to be taken away. Just wait until the tin has well wetted the pad and the wire and take the soldering iron away from the soldering area.
 6. Make sure not to move the just soldered component for about 5 seconds after removing the soldering iron. This should create a silver shining faultless soldering joint.
 7. For a faultless soldering joint and well done soldering is a clean non-oxidized soldering-tip absolutely required. It is not possible to perform a sufficient soldering joint with a dirty soldering tip. Therefore please clean the soldering tip from excessive solder-tin and dirt by using a wet sponge or a silicone cleaning pad after each soldering process.
 8. After completion of the soldering all connection wires have to be cutted off directly above the soldering joint by using a side cutter.
-
9. By soldering semiconductors (transistors, diodes), LED's and IC's it is very important never to exceed the soldering time of 5 seconds to prevent the destruction of the component. It is absolutely required to attend to the correct polarity of the component before starting the soldering process.
 10. After the board assembly carefully control the pc-board about correct insertion of the components and the correct polarity. Please check if no connections or copper tracks are accidentally short circuited by soldering tin. This can not only result to malfunction of the module but also result to a destruction of expensive components.
 11. Please take into account that improper soldering joints, wrong connections, faulty operation or wrong board assembly is not a matter within our sphere of influence.

General installation information

The contact-wires of resistors and diodes to be assembled in a lying position shall be bended in accordance to the raster distance into a right angular position and assembled into the specified bores (in accordance to the board assembly plan or the assembly markings). To prevent that the components will not fall out by turn-over the pc-board please bend the connection wires about 45° apart and solder them carefully to the copper pads on the rear side of the board. Finally the excessive wires shall be cutted off with a small side cutter.

The resistors in the supplied kits are metal-foil resistors. Those have a tolerance of 1% and are marked with a brown "tolerance-ring". The tolerance ring can be identified by the larger margin distance respectively the larger distance to the other four marking rings. Normally there are five color rings on the metal-foil resistors. To read the color code you have to locate the resistor that way that the brown tolerance ring will be on the right side. The color rings will be read from left to right!

Please take care to assemble diodes with the correct polarity (position of the cathode marking). Take care about a very short soldering time! The same will apply to the transistors and the integrated circuits (IC's). The flat side of the transistors has to correspond with the marking on the pc-board.

The transistor legs should never be assembled in a crossed position. Further those components should have a distance of about 5mm to the board. Attend to the short soldering time to prevent the damage of the component by excessive heat.

Capacitors shall be assembled into the respective marked bores, the wires to be bent a little apart and careful soldered to the copper pad. By the assembly of electrolytic capacitors (electrolytic cap) it has to be attended to the correct polarity (+,-)! **Wrong-way soldered electrolytic capacitors can explode during the application!** Therefore it is very important to check the correct polarity two- or even better three-times. In addition it has to be attended to the correct capacitor values, e.g. n10 = 100pF (not 10nF!).

A careful and clean assembly will drastically reduce the possibility that anything will not be in correct function. Check every step and every soldering joint two times before carrying on! Attend closely to the assembly list! Perform the described step not different and do not skip any step! Mark each step as done at the foreseen column after assembly and careful check.

Take your time. Private work is no piece-work because the time for careful assembly work is much less than an extensive fault diagnosis.

Final assembly

Sockets and integrated circuits (IC's) of the kits will be supplied on a piece of foam to assure safe transport.

This foam shall never be used below or between components as this foam is electrical conductive.

In case the kit will be taken into operation the conductive foam can produce a short circuitry and destroy the complete kit. Anyhow the function of the module will not be as expected.

Warranty

As we have no influence to the proper and correct assembly we have to limit our warranty to the complete supply and the faultless quality of the components.

We guarantee the function of the components in accordance to the identified values within a non-assembled condition of the parts and the compliance of the technical data of the circuit by attending to the respective soldering instruction and the specified start of operation of the module including connection and operation.

Further demands are not accepted.

We are not taking over any warranty nor any liability for any harm or sequential damage connected to this product.

We reserve our right for a repair, rework, supply of replacement or refund of the purchase price.

The following criteria will result to a non-repair respectively to a lost of right to claim under guarantee:

- if acid-containing soldering tin or fluxes with corrosive content and others have been used
- if the kit has been improperly soldered or assembled
- by alterations or repair-trials on the device
- by own circuit amendments
- by construction of non-intended improper displacement of components, free wiring of components etc.
- application of other non-original kit-components
- by damaging of copper tracks or soldering copper pads on the board
- by wrong assembly and the sub sequential damages
- overloading the module
- by damages caused by intervention of foreign persons
- by damages caused by disregarding the operation manual respectively the connection plan
- by connecting a wrong voltage respectively a wrong current
- by wrong polarity connection of the module
- by wrong operation or damages caused by negligent usage or abuse
- by defects caused by bridged or wrong fuses.

All such cases will result to a return of the kit to your expenses.